

FXM 2000

Rugged UPS Module



Your Power Solutions Partner

- 2000W/VA UPS designed to operate in extreme environments and provide maximum flexibility while ensuring critical loads remain protected and running during power outages and other power disturbances
- Wide range Automatic Voltage Regulation (AVR) lengthens battery life by providing protection without transferring to backup mode during voltage surge or sag
- Independently programmable control and reporting dry contacts allow monitoring and controlling of key functions
- Temperature compensated battery charging protects batteries from overcharging or undercharging at extreme temperatures, extending the life of the battery
- Local and remote monitoring and control via RS232 port and Ethernet SNMP interface*
- UPS panels can be rotated, improving flexibility and viewing convenience



Alpha FXM is a line of rugged UPS power modules used worldwide where clean backup power is needed. Designed to perform in the most extreme demanding environments, Alpha FXM units ensure equipment in security, communications, traffic, industrial environments, and many other critical applications remains safe and protected from power disturbances. Thanks to its powerful programmable battery charger, the FXM is capable of providing the runtime you need. All FXM models are available in 120Vac and 230Vac.

*Ethernet SNMP card is standard on the 120Vac model and optional on the 230Vac model

FXM 2000 Rugged UPS Module

Consult your Alpha representative for P/N configurations

ELECTRICAL

>120Vac Model

Battery string voltage:.....48Vdc

Nominal voltage:.....120Vac

Frequency:60Hz/50Hz $\pm 5\%$ (auto detection)

Input:

Voltage range:85 to 152Vac

Current:.....20A (@ nominal voltage and max battery charging current)

Output:

Waveform:Pure sinewave

Nominal voltage:120Vac

Voltage regulation: $\pm 10\%$ on line mode, $\pm 2\%$ on inverter mode

Power at 50°C:.....2000W/VA

Frequency:.....Output frequency = Input frequency

>230Vac Model

Battery string voltage:.....48Vdc

Nominal voltage:.....230Vac

Frequency:60Hz/50Hz $\pm 5\%$ (auto detection)

Input:

Current:.....12A (@ nominal voltage and max battery charging current)

Voltage range:150 to 328Vac

Output:

Waveform:Pure sinewave

Nominal voltage:230Vac

Voltage regulation $\pm 10\%$ on line mode, $\pm 2\%$ on inverter mode

Power at 55°C:.....2000W/VA

Frequency:.....Output frequency = Input frequency

MECHANICAL

Dimensions:

mm:.....133H x 394W x 222D

inches:5.22H x 15.5W x 8.75D

Weight:.....16kg (35lbs)

COMMUNICATION INTERFACE:

Display:.....2 x 20 backlit alpha-numeric LCD

Ports:DE-9 Female: Local RS232 Communication

RJ45: Remote Communication

RJ11: Battery Temperature Compensation

Indicators:Green & Red LED's

Solid Green: Line Mode

Flashing Green: Inverter Mode

Flashing Red: Alarm

Solid Red: Fault

Dry Contacts:Programmable NO/NC (250Vac, 1A)*, 3 user inputs, ATS

Factory Default:

- C1: On Battery
- C2, C3: Low Battery
- C4: Load Shed Timer 1
- C5: Alarm
- C6*: 48Vdc @ 500mA
- C7: User Inputs
- S1: Self test
- S2: User Input
- S3: Shutdown(EPO)
- C8: ATS

* C6 is factory configurable only

ENVIRONMENTAL

Operating temp range*:....-40 to 74°C (-40 to 165°F)

Humidity:Up to 95% (non condensing)

Altitude(m/ft):Up to 3700 (12,000)**

Audible noise @ 25°C:.....45dBA @ 1 meter (39in)

MTBF (hours):.....150K + as per Telcordia SR-332, 100% duty cycle ,full load

BTU/Hr:.....Normal mode 41W

Backup mode 439W

*120Vac module derates after 50°C (122°F). 230Vac module derates after 55°C (131°F)

**Derates 2°C per 300m (1000ft) above 1400m (4500ft)

PERFORMANCE

Typical output voltage THD: <3% (resistive load)



Typical efficiency: >98% (resistive load)

Typical transfer time: <5ms

Load Crest factor:..... 3:1 (load dependent)

POWER CONNECTOR OPTIONS

120Vac Model

Input	Output
Standard  Terminal Block	 Terminal Block

230Vac Model

Standard  Terminal Block	 Terminal Block
---	---


AGENCY COMPLIANCE

Electrical safety:UL1778, CSA 22.2 No 107.3; EN62040-1

Marks:  

EMC:CFR47, Part 15 Subpart B, Class A; CES-003 Class A; EN62040-2

**CE applies to 230Vac version only

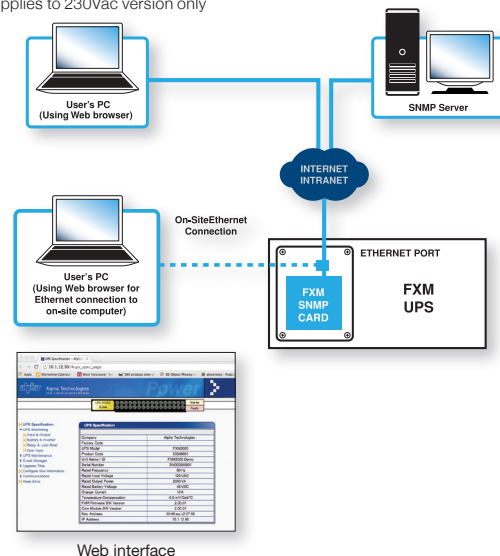

Alpha Technologies Ltd.

Canada: Burnaby, British Columbia T: 604.436.5900 F: 604.436.1233

United States: Bellingham, Washington T: 360.647.2360 F: 360.671.4936

Alpha Technologies reserves the right to make changes to the products and information contained in this document without notice.

Copyright © 2015 Alpha Technologies. All Rights Reserved. Alpha® is a registered trademark of Alpha Technologies.

member of The Alpha Group™ is a trademark of Alpha Technologies.

For more information visit www.alpha.ca

#0480014-00 Rev G (11/2015)

member of The  Group™